


PLN3™-32/HSN3™-32 FULLY PERFORED ROOF DECKS GRADE 50 STEEL


LRFD

11% OPEN FULLY PERFORATED N3 ROOF DECKS

- PLN3-32 FP11 Deck used with PunchLok® II System
- HSN3-32 FP11 Deck used with TSWs or BPs
- HSN3-32-NS FP11 Deck used with Side-lap Screws
- HSN3-32-SS FP11 Deck used with Side-lap Screws

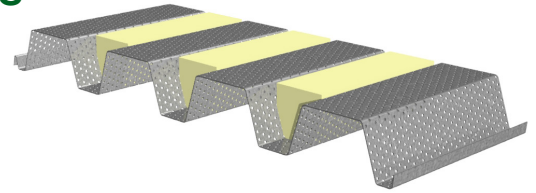

Nominal Dimensions

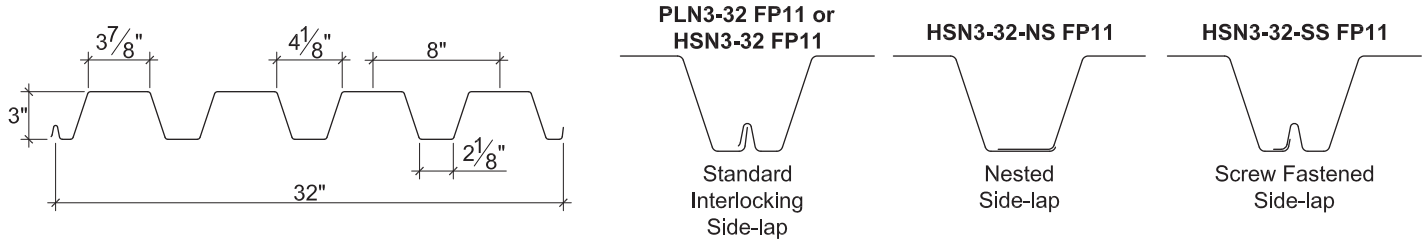

Section Properties

Deck Gage	Deck Weight w_{dd} (psf)	Base Metal Thickness t (in.)	Yield Strength F_y (ksi)	Effective Moment of Inertia at Service Load $I_d = (2I_e + I_g)/3$		Effective Section Modulus at $F_y = 50$ ksi		Vertical Web Shear ϕV_n (lb/ft)
				I_{d+} (in ⁴ /ft)	I_{d-} (in ⁴ /ft)	S_{e+} (in ³ /ft)	S_{e-} (in ³ /ft)	
22	1.8	0.0299	50	0.577	0.603	0.197	0.226	2642
20	2.1	0.0359	50	0.706	0.724	0.252	0.284	4336
18	2.8	0.0478	50	0.958	0.961	0.374	0.403	7682
16	3.5	0.0598	50	1.199	1.199	0.493	0.520	10253

Design Reactions at Supports Based on Web Crippling, ϕR_n (lb/ft)

Deck Gage	Bearing Length of Webs											
	One-Flange Loading						Two-Flange Loading					
	End Bearing				Interior Bearing		End Bearing				Interior Bearing	
	1 1/2"	2"	3"	4"	4"	8"	1 1/2"	2"	3"	4"	4"	8"
22	815	896	1031	1145	1831	2138	737	794	889	969	2070	2441
20	1159	1270	1455	1612	2569	3184	1131	1214	1353	1471	2965	3727
18	1999	2179	2482	2737	4352	5449	2159	2306	2552	2760	5160	6566
16	3050	3312	3752	4123	6557	8136	3523	3748	4125	4443	7907	9977

Standard Features

- ASTM A653 SS GR50 Min., with G60 or G90, white or gray primer optional
- ASTM A1008 SS GR50 Min. with gray primer
- Standard lengths – 6'-0" to 40'-0"
- IAPMO UES ER-2018 Listed
- Tables conform to ANSI/SDI RD-2017

Optional Features

- Inquire regarding cost and lead times for:
 - Short cuts < 6'-0"
 - Sheet Lengths > 40'-0"
 - Alternative metallic and painted finishes
- Web Perforated Acoustical Versions

PLN3™-32/HSN3™-32 FULLY PERFERED ROOF DECKS GRADE 50 STEEL

LRFD

Inward Uniform Design Loads, LRFD (psf)

FP11

Deck Gage	Spans	Criteria	Span (ft-in.)										
			4'-0"	6'-0"	8'-0"	9'-0"	10'-0"	11'-0"	12'-0"	14'-0"	16'-0"	18'-0"	20'-0"
22	Single	ϕW_n	369	164	92	73	59	49	41	30	23	18	15
		L/240	591	175	74	52	38	28	22	14	9	6	5
	Double	ϕW_n	393	182	104	82	67	55	47	34	26	21	17
		L/240	1488	441	186	131	95	72	55	35	23	16	12
	Triple	ϕW_n	477	224	129	102	83	69	58	43			
		L/240	1166	346	146	102	75	56	43	27			
20	Single	ϕW_n	473	210	118	93	76	62	53	39	30	23	19
		L/240	723	214	90	63	46	35	27	17	11	8	6
	Double	ϕW_n	509	232	132	104	85	70	59	43	33	26	21
		L/240	1786	529	223	157	114	86	66	42	28	20	14
	Triple	ϕW_n	624	287	164	130	105	87	73	54			
		L/240	1400	415	175	123	90	67	52	33			
18	Single	ϕW_n	701	312	175	138	112	93	78	57	44	35	28
		L/240	981	291	123	86	63	47	36	23	15	11	8
	Double	ϕW_n	734	331	187	148	120	100	84	62	47	37	30
		L/240	2371	703	296	208	152	114	88	55	37	26	19
	Triple	ϕW_n	906	412	234	185	150	124	104	77			
		L/240	1858	551	232	163	119	89	69	43			
16	Single	ϕW_n	924	411	231	183	148	122	103	75	58	46	37
		L/240	1228	364	154	108	79	59	45	29	19	13	10
	Double	ϕW_n	949	428	242	192	155	128	108	79	61	48	39
		L/240	2958	877	370	260	189	142	110	69	46	32	24
	Triple	ϕW_n	1172	532	302	239	194	160	135	99			
		L/240	2319	687	290	204	148	111	86	54			

Note:

1. Table does not account for web crippling. Required bearing should be determined based on specific span conditions.

NOTICE: Design defects that could cause injury or death may result from relying on the information in this document without independent verification by a qualified professional. The information in this document is provided "AS IS". Nucor Corporation and its affiliates expressly disclaim: (i) any and all representations, warranties and conditions and (ii) all liability arising out of or related to this document and the information in it.